

HB-Fix Lip-Seal

APPLICATION

Pipes and Fittings

- PVC sewer pipes and fittings according EN 1401-1, DIN 19534
- PP sewer pipes and fittings according EN 1852

Material

Hardness: 60 ± 5 IRHD
 TPE-V (seal) / PP (fix ring)
 EN 681-2 WT / WH (oil resistant)

Performance of the seal

- locked-in-gasket
- automatic assembly possible
- low insertion force
- reliable function under extreme condition (2.5 bar)
- long life time performance, low relaxation
- Kiwa approval according BRL 2020


Bode GmbH

- Material approval and production inhouse
- High consistency of all properties confirmed by external surveillance: MPA and Kiwa




DIMENSIONS - mm

DN/OD (EN 1401/1451 EN 1852)	DN (DIN 19534/19560)	Ø D (mm)	b (mm)	h (mm)
110	100	121.60 ± 0.4	7.80 ± 0.2	8.60 ± 0.4
125	125	138.30 ± 0.4	9.00 ± 0.2	9.80 ± 0.4
160	150	175.10 ± 0.4	10.20 ± 0.2	11.00 ± 0.4
200	200	216.80 ± 0.5	11.90 ± 0.2	12.00 ± 0.4
250	250	274.90 ± 1.0	17.20 ± 0.4	19.00 ± 0.4
315	300	341.80 ± 1.2	18.50 ± 0.4	20.00 ± 0.8
400	400	430.90 ± 1.2	20.00 ± 0.6	23.60 ± 0.9
500	500	539.10 ± 2.4	24.00 ± 0.7	28.80 ± 0.9

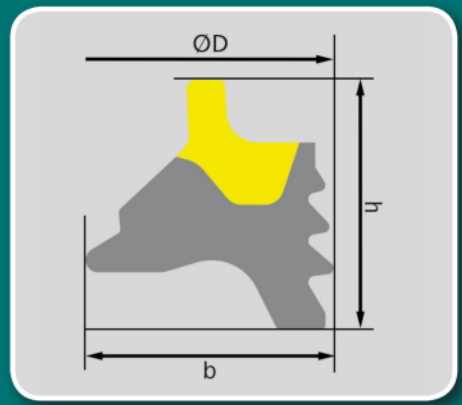

Subject to modifications and amendments – © Bode GmbH, Henstedt-Ulzburg 2018

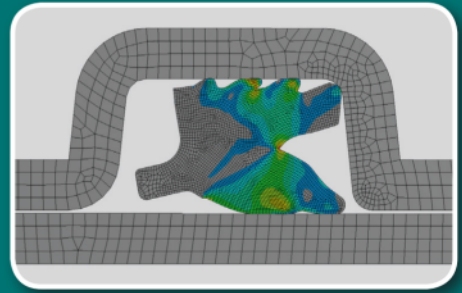

Bode GmbH
 Kirchweg 114
 24558 Henstedt-Ulzburg
 Germany
 P.O.Box 1162
 24547 Henstedt-Ulzburg

Tel.: + 49 (0) 4193 982-0
 Fax: + 49 (0) 4193 982-2222
 email: info@bode.eu
 www.bode.eu